

(19)

Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

EP 0 947 261 A2

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:  
06.10.1999 Bulletin 1999/40

(51) Int Cl.<sup>6</sup>: B22D 11/06

(21) Application number: 98307305.7

(22) Date of filing: 09.09.1998

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE  
Designated Extension States:  
AL LT LV MK RO SI

(72) Inventors:  
• Fish, John Andrew  
Woonona 2517 NSW (AU)  
• Kato, Heiji  
Yokosuka-shi, Kanagawa-ken (JP)

(30) Priority: 18.09.1997 AU P0925397  
28.05.1998 AU PP375298

(74) Representative: Lerwill, John et al  
A.A. Thornton & Co.  
Northumberland House  
303-306 High Holborn  
London, WC1V 7LE (GB)

(71) Applicants:  
• Ishikawajima-Harima Heavy Industries Co., Ltd.  
Chiyoda-ku, Tokyo 100 (JP)  
• BHP STEEL (JLA) PTY. Ltd.  
Melbourne, Victoria 3000 (AU)

### (54) Strip casting apparatus

(57) Apparatus for continuously casting metal strip comprises a pair of parallel casting rolls (16). In use of the apparatus molten metal is delivered between the casting rolls which are rotated to deliver cast strip product downwardly from the rolls. casting rolls (16) are mounted on a roll module (13) installed in and remova-

ble from the caster as a unit. Module (13) is movable horizontally from a stand-by position to an intermediate position beneath a casting position of the rolls and can be hoisted from the intermediate position by operation of hoists (71) to lift the rolls (16) into their casting position.

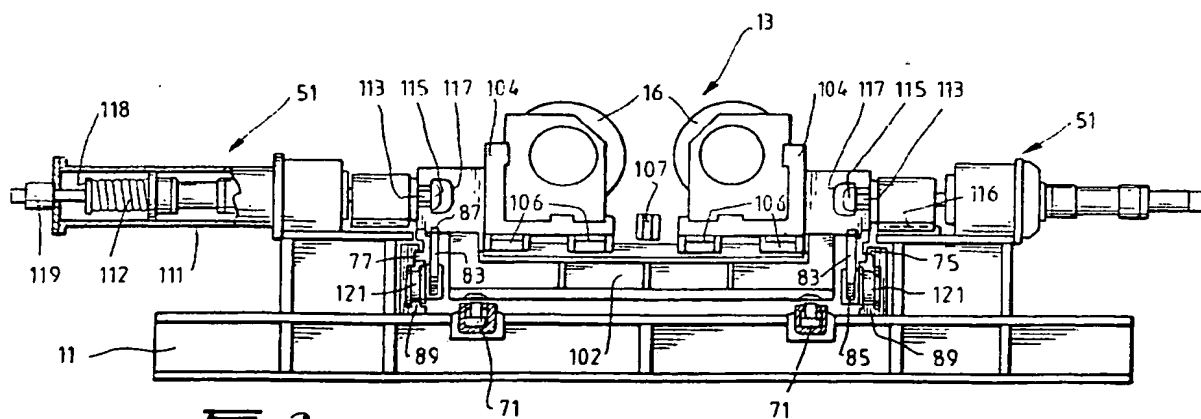


FIG. 2.

## Description

### BACKGROUND OF THE INVENTION

[0001] This invention relates to the casting of metal strip. It has particular application to the casting of metal strip by continuous casting in a twin roll caster.

[0002] In a twin roll caster molten metal is introduced between a pair of contra-rotated horizontal casting rolls which are cooled so that metal shells solidify on the moving roll surfaces and are brought together at the nip between them to produce a solidified strip product delivered downwardly from the nip between the rolls. The term "nip" is used herein to refer to the general region at which the rolls are closest together. The molten metal may be poured from a ladle into a smaller vessel or series of vessels from which it flows through a metal delivery nozzle located above the nip so as to direct it into the nip between the rolls, so forming a casting pool of molten metal supported on the casting surfaces of the rolls immediately above the nip and extending along the length of the nip. This casting pool is usually confined between side plates or dams held in sliding engagement with end surfaces of the rolls so as to dam the two ends of the casting pool against outflow, although alternative means such as electromagnetic barriers have also been proposed.

[0003] The change-over of the casting rolls in a twin roll caster is a significant problem. The rolls may need to be changed between casts so as to allow a different width of strip to be cast and the rolls must be replaced if the casting surfaces are in any way damaged or deteriorate during casting. If the rolls have to be changed in situ, a significant amount of potential casting time is lost waiting for the casting components and the area surrounding them to cool. The new set of rolls, once in place, has to be calibrated prior to casting so that the nip width can be pre-set.

[0004] When casting ferrous metals, it is necessary to preheat the refractory components of the metal delivery and pool confinement means to very high temperatures before casting commences. For these reasons it has been proposed to build twin roll casters with demountable components so that the rolls and preheated refractory components can be rapidly brought together into an operative assembly and casting started before the preheated components cool significantly. One example of a caster with moveable rolls and refractory components is disclosed in our Australian Patents 631728 and 637548 and corresponding United States Patents 5,184,668 and 5,277,243.

[0005] The present invention enables a twin roll strip caster to be built with a modular construction in which the casting rolls are installed in a moveable module readily moveable into and out of the machine. A previous proposal for mounting the rolls on a moveable module is described in Japanese Patent Publication JP-B93-9185 of Mitsubishi Heavy Industries Ltd. In that pro-

posal the rolls and the pool confining side plates are mounted together on a frame which is carried on a wheeled car moveable horizontally into and out of the machine along rails. The present invention provides a different arrangement in which a roll module is moved horizontally into an intermediate position beneath the final casting position and is then lifted into the casting position. This enables the rolls to be quickly manoeuvred into the casting position without requiring movement of any ancillary equipment or components. In a preferred embodiment of the invention the rolls can be lifted into position between a pair of pool confinement side plates without the need to move the side plates.

### SUMMARY OF THE INVENTION

[0006] According to the present invention there is provided an apparatus for continuously casting metal strip which includes: a pair of parallel casting rolls forming a nip between them; metal delivery means to deliver molten metal into the nip between the rolls to form a casting pool of molten metal supported on casting roll surfaces immediately above the nip; pool confining means at the ends of the rolls confining the pool against outflow from the ends of the nip; and roll drive means to drive the casting rolls in counter-rotational directions to produce a solidified strip of metal delivered downwardly from the nip; wherein the casting rolls are mounted on a roll-module installed in and removable from the caster as a unit and movable horizontally transversely to a casting direction from a stand-by position to an intermediate position beneath a casting position of the rolls and thereafter vertically to lift the rolls to the casting position; and wherein the apparatus includes a lifting means for lifting the roll module and rolls mounted thereon from the intermediate position to the casting position.

[0007] Preferably the lifting means includes a fluid cylinder actuated hoist.

[0008] Preferably the apparatus includes drive coupling means which automatically couple the roll drive means to the casting rolls when the roll module is in the intermediate position.

[0009] Preferably the apparatus includes water coupling means which automatically couple a water cooling means to the rolls when the roll module is in the intermediate position.

[0010] Preferably the roll module further includes a module frame and roll carriers moveable on the module frame to permit bodily movement of the rolls toward and away from one another to vary the nip between them.

[0011] Preferably the apparatus further includes a roll biasing means operable when the roll module is in the casting position to move the casting rolls from an open position towards each other to vary the width of the nip.

[0012] Preferably the pool confining means is in the casting position prior to moving the roll module from stand-by position to the intermediate position and thereafter to the casting position. Moving the roll module to

the intermediate position beneath the casting position and holding the casting rolls in the open position ensures that there is no contact between the rolls and the pool confining means during the installation of the rolls.

[0013] Preferably the roll biasing means is operable to move the casting rolls away from each other.

[0014] Preferably the roll module further includes an adjustable stop means disposed beneath the nip and between the roll carriers to serve as a spacer stop for engagement with the roll carriers to pre-set the minimum width of the nip between the rolls and adjustable in width to vary the minimum width of the nip.

[0015] Preferably the roll biasing means is operable to move the casting rolls from an open position to the stop means and thereafter to bias the rolls against the stop means.

[0016] Preferably, the roll module further includes a means for holding the roll carriers in the open position.

[0017] Preferably the holding means includes a locking pin assembly having locking pins carried by the module frame that can be received in openings in the roll carriers.

[0018] Preferably the locking pins are fixed relative to the roll carriers so that when the roll carriers and the rolls thereon are lifted from the intermediate position to the casting position the roll carriers are moved clear of and therefore are not retained by the locking pins.

[0019] The roll carriers may comprise a pair of roll end support structures for each of the rolls disposed generally beneath the ends of the respective roll.

[0020] Each pair of roll end support structures may carry journal bearings mounting the respective roll ends for rotation about a central roll axis.

[0021] The roll end support structures may be mounted on the module frame for generally horizontal movement of the rolls toward and away from one another.

[0022] The module frame may be moveable horizontally on linear bearings into and out of the intermediate position in the caster.

[0023] The roll module may be firmly clamped vertically by operation of the fluid cylinder actuated hoist described above lifting the roll module so that stop surfaces on the roll module contact fixed stop surfaces on the caster.

[0024] Appropriate indexing means may be provided for indexing of the module frame with the main machine frame when the module frame is hoisted so as to provide for accurate positioning of the module frame longitudinally of the rolls.

[0025] The roll biasing means may include a pair of biasing units for each roll and the biasing units being connectable to the roll carriers.

[0026] The biasing units may be carried on moveable mountings on the caster so that they can be readily moved into and out of operative inter-engagement with the roll carriers.

[0027] The invention also provides apparatus for continuously casting metal strip comprising a pair of parallel

casting rolls forming a nip between them; metal delivery means to deliver molten metal into the nip between the rolls to form a casting pool of molten metal supported on casting roll surfaces immediately above the nip; pool confining means at the ends of the rolls against outflow from the ends of the nip; and roll drive means to drive the casting rolls in counter-rotational directions to produce a solidified strip of metal delivered downwardly from the nip; wherein the casting rolls are mounted on a roll module installed in and removable from the caster as a unit, said module comprising a module frame; roll carriers moveable on the module frame to permit bodily movement of the rolls toward and away from one another to vary the nip between them; and adjustable stop means disposed beneath the nip and between the roll carriers to serve as a spacer stop for engagement with the roll carriers to pre-set the minimum width of the nip between the rolls and adjustable in width to vary the minimum width of the nip.

[0028] According to the present invention there is also provided a method of positioning casting rolls in a continuous strip caster which includes the steps of: moving a roll module carrying a pair of parallel casting rolls horizontally in a direction transverse to a casting direction from a stand-by position to an intermediate position; coupling the rolls to a roll drive means and a water cooling unit at the intermediate position; and lifting the roll module to a casting position.

[0029] Preferably, the roll drive means and the water cooling unit are automatically coupled to the rolls when the roll module is moved to the intermediate position.

[0030] Preferably, after lifting the roll module to the casting position, the method further includes moving the rolls inwardly to a pre-set nip position.

[0031] Preferably, the rolls are held apart prior to being lifted to the casting position and the lifting movement releases the rolls for inward movement.

#### BRIEF DESCRIPTION OF THE DRAWINGS

[0032] In order that the invention may be fully explained one particular embodiment will be described in some detail with reference to the accompanying drawings in which:

Figure 1 is a vertical cross section through a strip caster constructed in accordance with the present invention.

Figure 2 is a side elevation of the caster shown in Figure 1 with the tundish and distributor removed for clarity and with the casting roll module in an intermediate position and the casting rolls in an open position;

Figure 3 is the same side elevation as shown in Figure 2 but with the roll module/casting rolls separated from the caster for clarity;

Figure 4 is a further side elevation of the caster with the roll module in a raised casting position and the

rolls in an open position;

Figure 5 is a further side elevation of the caster with the roll module in the raised casting position and the rolls at a pre-set nip spacing.

Figure 6 is a top plan view of the caster;

Figure 7 is a top plan view illustrating in detail an end section of the roll module/casting rolls and the coupling of the rolls to water supply hoses and roll drive spindles; and

Figure 8 is a side elevation of the section of the caster shown in Figure 7.

#### DESCRIPTION OF PREFERRED EMBODIMENT

**[0033]** The illustrated caster comprises a main machine frame 11 which supports a casting roll module in the form of a roll cassette 13 which can be moved into an operative position in the caster as a unit but can readily be removed when the rolls are to be replaced. Cassette 13 carries a pair of parallel casting rolls 16 to which molten metal is supplied during a casting operation from a ladle (not shown) via a ladle outlet nozzle 46, a tundish 17, a distributor 18 and a delivery nozzle 19 to create a casting pool 30 which is confined by the rolls 16 and by a pair of side closure plates 18. Casting rolls 16 are water cooled so that shells solidify on the moving roll surfaces and are brought together at the nip between them to produce a solidified strip product 20 at the roll outlet. This product may be fed to a standard coiler.

**[0034]** The illustrated twin roll caster as thus far described is of the kind which is illustrated and described in some detail in Australian Patent 664670 and United States Patent 5,488,988 and reference may be made to those patents for appropriate constructional details which form no part of the present invention.

**[0035]** Casting rolls 16 are contra-rotated through drive shafts 41 from an electric motor and transmission which includes drive spindles 128 mounted on the main machine frame. The drive shafts 41 can be disconnected from the transmission when the cassette 13 is to be removed from the caster. Rolls 16 have copper peripheral walls formed with a series of longitudinally extending and circumferentially spaced water cooling passages (not shown) supplied with cooling water through the roll ends from water supply ducts (not shown) in the roll drive shafts 41 which are connected to water supply hoses 42 through rotary glands 43. The rolls may typically be about 500 mm diameter and up to 2000 mm long in order to produce strip product approximately the width of the rolls.

**[0036]** The ladle is of entirely conventional construction and is supported on a rotating turret (not shown) whence it can be brought into position over the tundish 17 to fill the tundish. The tundish may be fitted with a sliding gate valve 47 actuatable by a servo cylinder to allow molten metal to flow from the tundish 17 through the valve 47 and the refractory shroud 48 into the distributor 18.

**[0037]** The distributor 18 is formed as a wide dish made of a refractory material such as magnesium oxide (MgO). One side of the distributor 18 receives molten metal from the tundish 17 and the other side of the distributor 18 is provided with a series of longitudinally spaced metal outlet openings (not shown). The lower part of the distributor 18 carries mounting brackets (not shown) for mounting the distributor onto the main caster frame when the cassette is installed in its casting position.

**[0038]** Delivery nozzle 19 is formed as an elongate body made of a refractory material such as alumina graphite. Its lower part is tapered so as to converge inwardly and downwardly so that it can project into the nip between the casting rolls 16. Its upper part is formed with outwardly projecting side flanges (not shown) which locate on a mounting bracket (not shown) which forms part of the main frame.

**[0039]** Nozzle 19 may have a series of horizontally spaced generally vertically extending flow passages (not shown) to produce a suitably low velocity discharge of metal throughout the width of the rolls 16 and to deliver the molten metal into the nip between the rolls without direct impingement on the roll surfaces at which initial solidification occurs. Alternatively, the nozzle 19 may have a single continuous slot outlet (not shown) to deliver a low velocity curtain of molten metal directly into the nip between the rolls 16 and/or it may be immersed in the molten metal pool.

**[0040]** Side closure plates 18 are made of a strong refractory material, for example boron nitride, and have scalloped side edges to match the curvature of stepped ends of the rolls.

**[0041]** During a casting operation the sliding gate valve 47 is actuated to allow molten metal to pour from the tundish 17 to the distributor 18 and through the metal delivery nozzle 19 whence it flows onto the casting rolls. The head end of the strip product 20 is guided to the jaws of a coiler (not shown).

**[0042]** In accordance with the invention, the roll cassette 13 is movable:

(i) horizontally in a direction that is transverse to the casting direction of the caster (in the casting direction is denoted by the arrow A in the Figures) from a stand-by position located on one side of the caster to an intermediate position beneath a casting position, and thereafter

(ii) vertically to the casting position.

**[0043]** Figure 2 shows the roll cassette 13 at the intermediate position and Figures 4 and 5 show the roll cassette 13 at the raised casting position.

**[0044]** Movement of the roll cassette 13 to the intermediate position bring the casting rolls 16 into contact with and automatically couples the rolls 16 to the drive spindles 128 and the water supply hoses 42.

[0045] The roll cassette 13 is constructed so that the casting rolls 16 can be set up and the nip between them pre-set at the stand-by position before the cassette is installed in position in the caster.

[0046] Roll cassette 13 includes a large frame 102 supported on four wheels 121 which carries the rolls 16 and upper part (not shown) of the refractory enclosure for enclosing the cast strip below the nip. The caster includes a pair of rails 89 for guiding the wheels 121 between the stand-by position and the intermediate position. Rolls 16 are mounted on roll supports 104 which carry roll end bearings (not shown) by which the rolls are mounted for rotation about their longitudinal axes in parallel relationship with one another. The two pairs of roll supports 104 are mounted on the roll cassette frame 102 by means of linear bearings 106 whereby they can slide laterally of the cassette frame to provide for bodily movement of the rolls 16 toward and away from one another thus permitting separation and closing movement of the two parallel rolls between an open position shown in Figure 4 and a pre-set nip position shown in Figure 5.

[0047] The caster includes a lifting means in the form of four fluid cylinder actuated hoists 71 supported by the machine frame 11 and located to underlie the corner regions of the roll cassette frame 102 when the roll cassette 13 is at the intermediate position - as can best be seen in Figures 2, 4 and 5. Actuation of the hoists 71 lifts the roll cassette 13 to the casting position. The upward movement of the roll cassette 13 is limited by inwardly extending flanges 75 on the guide rails 89 which are contacted by outwardly extending flanges 77 on the roll cassette frame 102.

[0048] The rolls 16 are retained at the open position shown in Figure 4 by four locking pin assemblies housed in vertical openings in the base of roll cassette frame 102. Each pin assembly includes a locking pin 83 which is biased upwardly by means of a spring 85. In the open position of the rolls 16 shown in Figure 4 the locking pins 83 extend into openings 87 in the base of roll supports 104. Upward movement of the roll cassette frame 102 relative to the locking pins 83 moves the roll cassette frame 102 clear of the pins and thereby releases the rolls 16 for movement inwardly by the action of roll biasing units 51 described hereinafter to bring the rolls 16 to the pre-set nip position shown in Figure 5.

[0049] Roll cassette frame 102 also carries two adjustable spacers 107 (shown only in Figures 2 and 3) in the form of a worm or screw driven jack disposed beneath the rolls 16 about a central vertical plane between the rolls 16 and located between the two pairs of roll supports 104 so as to serve as stops limiting inward movement of the two roll supports thereby to define the pre-set nip position, ie the minimum width of the nip between the rolls. The roll biasing units 51 act continuously to bias the roll supports 104 inwardly toward these central stops to permit outward springing movement of the rolls against preset biasing forces.

[0050] There are four roll biasing units 51 disposed in

two pairs acting one pair on the supports 104 of each roll 16. Each roll biasing unit 51 includes a spring housing 111 containing a biasing spring 112 acting on a thrust rod 113 which is connected at its forward end to the respective roll support 104. The forward end of each thrust rod 113 has an enlarged head 115 located in a keyhole opening 117 in a side of one of the roll supports 104. The heads 115 of the thrust rods 113 are positioned in the keyholes 117 as the roll cassette 13 moves from the stand-by position to the intermediate position. The vertical dimension of the keyholes 117 is larger than the diameter of the enlarged heads 115 to accommodate vertical movement of the roll cassette 13 relative to the roll biasing units 51 as the roll cassette 13 is lifted from the intermediate position to the casting position. Each unit 51 is supported at its forward end on the main machine frame 11 by a linear bearing 116. When the roll cassette 13 is in the casting position shown in Figure 4 the thruster rods 113 can be translated inwardly by operation of hydraulic cylinder units so that the units 51 can move the rolls 16 to the preset nip position shown in Figure 5 and then provide a biasing action against the rolls. The spring biasing force of each roll biasing unit 51 can be adjusted by operation of a motor 117 which actuates a screw thread on spring plunger 118 to move the plunger and thereby adjust the compression in the spring 112.

[0051] The illustrated caster construction enables the rolls to be accurately set up out of the machine or offline and rapidly installed when required. Accordingly it is possible to set up rolls between casts in replacement cassettes and to accurately preset the nip spacing. Because the spacing between the rolls is accurately set by the centralised stops and the roll biasing forces bias the rolls inwardly against the stops, it is also possible to preload the rolls with appropriate biasing forces as soon as the cassette is installed and it is not necessary as in previous casters to wait for metal to pass through the rolls to develop reactive forces resisting roll separation. The direct coupling of the roll biasing units between the cassette frame and the roll supports also virtually eliminates friction in the spring control mechanism.

[0052] The illustrated caster construction also enables change-over of rolls quickly and effectively without interference with pre-positioned pool confining end plates

[0053] The illustrated caster has been advanced by way of example only and it could be modified considerably. For example it is not essential that the roll supports be mounted on linear bearings for strict linear movement. They could alternatively be supported from the cassette frame on pivot arms to allow arcuate movement providing the necessary lateral movement of the rolls to permit appropriate springing movement. This arrangement would enable further reduction of the effective friction on roll movement. Similarly the roll biasing units 51 could be mounted on pivot arms and brought into position for connection with the installed cassette

by actuation of hydraulic or pneumatic cylinder units acting on the supporting pivot arms. The precise manner in which the cassette is transported into and out of the casting machine could also be varied.

[0054] Moreover, the spring biasing units could be incorporated into the moveable cassette. However, this would require more moveable components and since each change of cassette would also involve a change of load cells, the cells would need to be recalibrated at each change. It is therefore preferred to mount a single set of biasing units and load cells on the main frame and to connect them to the roll supports when the cassette is moved into its operative position.

[0055] It is accordingly to be understood that the invention is in no way limited to the constructional details of the illustrated apparatus and that many modifications and variations may be made without departing from the scope of the appended claims.

## Claims

1. Apparatus for continuously casting metal strip which includes: a pair of parallel casting rolls (16) forming a nip between them; metal delivery means (46, 17, 18, 19) to deliver molten metal into the nip between the rolls to form a casting pool (30) of molten metal supported on casting roll surfaces immediately above the nip; pool confining means (18) at the ends of the rolls (16) confining the pool (30) against outflow from the ends of the nip; and roll drive means (128) to drive the casting rolls in counter-rotational directions to produce a solidified strip of metal (20) delivered downwardly from the nip; characterised in that the casting rolls (16) are mounted on a roll module (13) installed in and removable from the caster as a unit and movable horizontally transversely to a casting direction from a stand-by position to an intermediate position beneath a casting position of the rolls and thereafter vertically to lift the rolls to the casting position, and the apparatus includes a lifting means for lifting the roll module (13) and rolls (16) mounted thereon from the intermediate position to the casting position.
2. Apparatus as claimed in claim 1, further characterised in that the lifting means (71) includes a fluid cylinder actuated hoist.
3. Apparatus as claimed in claims 1 or claim 2, further characterised in that the apparatus includes drive coupling means (41) which automatically couple the roll drive means (128) to the casting rolls (16) when the roll module is in the intermediate position.
4. Apparatus as claimed in any one of claims 1 to 3, further characterised in that the apparatus includes water coupling means (42) which automatically couple a water cooling means to the rolls when the roll module is in the intermediate position.
5. Apparatus as claimed in any one of claims 1 to 4, further characterised in that the roll module (13) further includes a module frame (102) and roll carriers (104) moveable on the module frame (102) to permit bodily movement of the rolls (16) toward and away from one another to vary the nip between them.
6. Apparatus as claimed in claim 5, further characterised in that the roll module (13) further includes an adjustable stop means (107) disposed beneath the nip and between the roll carriers (104) to serve as a spacer stop for engagement with the roll carriers to pre-set the minimum width of the nip between the rolls (16) and adjustable in width to vary the minimum width of the nip.
7. Apparatus as claimed in claim 6, further characterised in that the apparatus further includes roll biasing means (51) operable to move the casting rolls from an open position to the stop means (107) and thereafter to bias the rolls against the stop means.
8. Apparatus as claimed in any one of claims 5 to 7, further characterised in that the roll module (13) further includes a means (83, 85) for holding the roll carriers (104) in the open position.
9. Apparatus as claimed in claim 8, further characterised in that the holding means includes a locking pin assembly having locking pins (83) carried by the module frame that can be received in openings in the roll carriers.
10. Apparatus as claimed in claim 9, further characterised in that the locking pins (83) are fixed relative to the roll carriers so that when the roll carriers (104) and the rolls thereon are lifted from the intermediate position to the casting position the roll carriers are moved clear of and therefore are not retained by the locking pins (83).
11. Apparatus as claimed in any one of claims 5 to 10, further characterised in that the roll carriers (104) comprise a pair of roll end support structures for each of the rolls disposed generally beneath the ends of the respective roll.
12. Apparatus as claimed in claim 11, further characterised in that each pair of roll end support structures (104) carries journal bearings mounting the respective roll ends for rotation about a central roll axis.
13. Apparatus as claimed in claim 12, further charac-

terised in that the roll end support structures (104) are mounted on the module frame (102) for generally horizontal movement of the rolls toward and away from one another.

14. Apparatus as claimed in any one of claims 5 to 13, further characterised in that the module frame (102) is moveable horizontally on linear bearings (89, 121) into and out of the intermediate position in the caster.

15. Apparatus as claimed in any one of claims 1 to 14, further characterised in that the roll module (13) is firmly clamped vertically by operation of the lifting means (71) lifting the roll module so that stop surfaces (77) on the roll module contact fixed stop surfaces (75) on the caster.

16. Apparatus as claimed in claim 15, further characterised in that indexing means is provided for indexing of the module frame with the main machine frame when the module frame is hoisted so as to provide for accurate positioning of the module frame longitudinally of the rolls.

17. Apparatus as claimed in any one of claims 1 to 5, further characterised in that the apparatus further includes a roll biasing means (51) operable when the roll module is in the casting position to move the casting rolls from an open position towards each other to vary the width of the nip.

18. Apparatus as claimed in any one of claims 1 to 17, further characterised in that the pool confining means (18) is in the casting position prior to moving the roll module (13) from stand-by position to the intermediate position and thereafter to the casting position.

19. Apparatus for continuously casting metal strip comprising a pair of parallel casting rolls (16) forming a nip between them; metal delivery means (46, 17) to deliver molten metal into the nip between the rolls to form a casting pool (30) of molten metal supported on casting roll surfaces immediately above the nip; pool confining means (18) at the ends of the rolls against outflow from the ends of the nip; and roll drive means (128) to drive the casting rolls in counter-rotational directions to produce a solidified strip (20) of metal delivered downwardly from the nip; characterised in that the casting rolls (16) are mounted on a roll module installed (13) in and removable from the caster as a unit, said module (13) comprising a module frame (102); roll carriers (104) moveable on the module frame to permit bodily movement of the rolls (16) toward and away from one another to vary the nip between them; and adjustable stop means (107) disposed beneath the nip

and between the roll carriers (104) to serve as a spacer stop for engagement with the roll carriers to pre-set the minimum width of the nip between the rolls and adjustable in width to vary the minimum width of the nip.

20. Apparatus as claimed in claim 19, further characterised in that the apparatus further comprises roll biasing means (51) operable when the module (13) is installed to bias the roll carriers (104) against the stop means (107).

21. Apparatus as claimed in claim 20, further characterised in that the roll biasing means (51) is operable to act between the module frame (102) and the roll carriers (104) to bias the roll carriers (104) toward the adjustable stop means (107).

22. Apparatus as claimed in claim 20 or claim 21, further characterised in that the roll biasing means (51) comprises a pair of biasing units for each roll, each biasing unit (51) being connectable to the module (13) to provide spring biasing of the respective roll (16) when the module is in its operative position but releasable from the module to enable the module to be removed from the caster.

23. Apparatus as claimed in claim 22, further characterised in that the spring biasing units (51) are carried on moveable mountings on the caster so that they can be moved into and out of operative inter-engagement with the module.

24. A method of positioning casting rolls in a continuous strip caster characterised by the steps of: moving a roll module (13) carrying a pair of parallel casting rolls (16) horizontally in a direction transverse to a casting direction from a stand-by position to an intermediate position; coupling the rolls (16) to a roll drive means (128) and a water cooling unit (42) at the intermediate position; and lifting the roll module (13) to a casting position.

25. A method as claimed in claim 24, further characterised in that the roll drive means (128) and the water cooling unit (42) are automatically coupled to the rolls when the roll module is moved to the intermediate position.

26. A method as claimed in claim 24 or claim 25, further characterised in that after lifting the roll module to the casting position, the method further includes moving the rolls inwardly to a pre-set nip position.

27. A method as claimed in claim 26, further characterised in that the rolls are held apart prior to being lifted to the casting position and the lifting movement releases the rolls for inward movement.

28. A method as claimed in any one of claims 23 to 27, further characterised in that a pair of casting pool confinement plates (18) are positioned one to either side of the space to be occupied by the casting rolls when in the casting position and the casting rolls (16) move upwardly between the pool confinement plates (18) when the roll module (13) is lifted to the casting position.

10

15

20

25

30

35


40

45

50

55



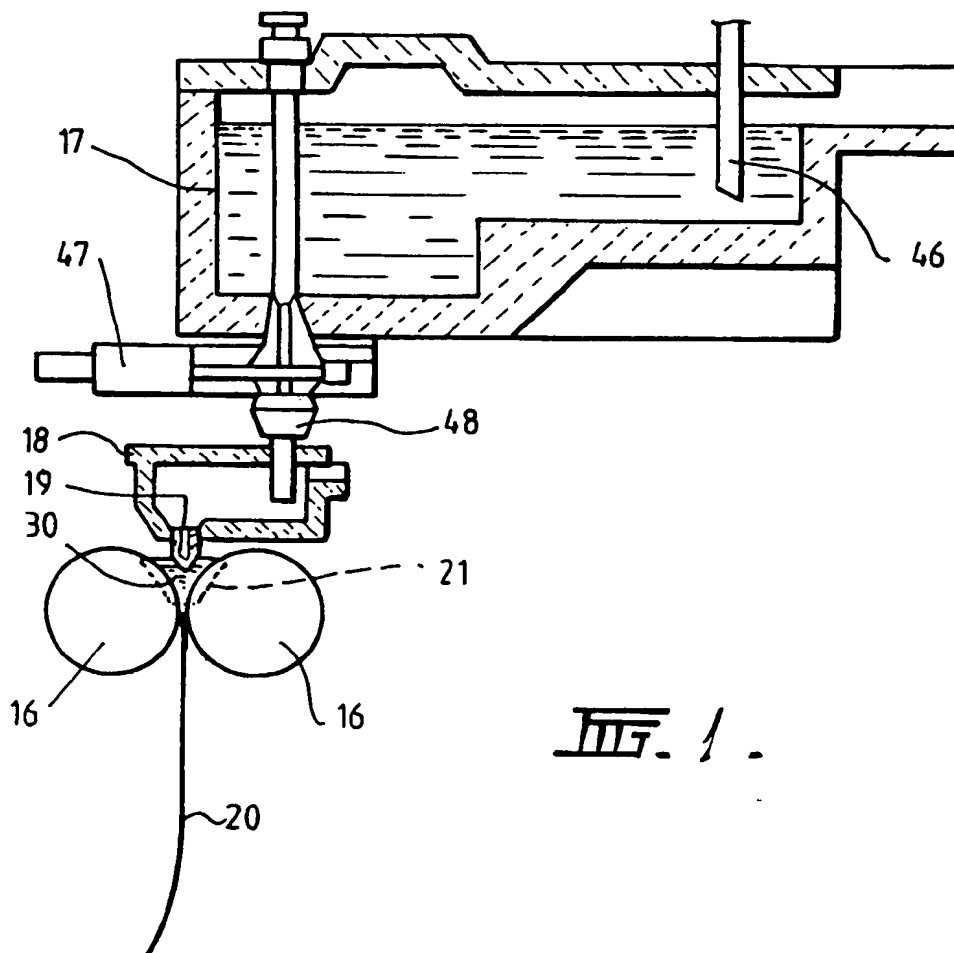

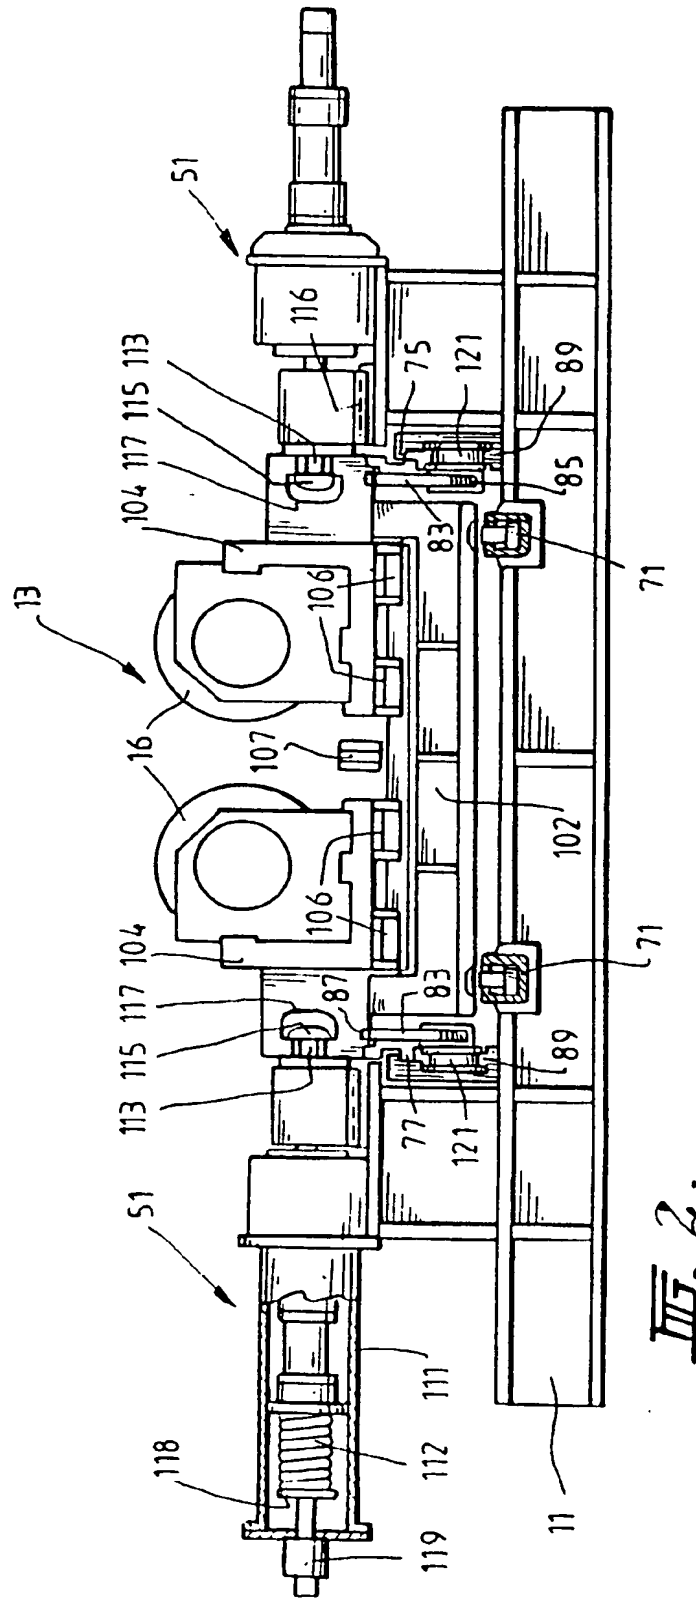
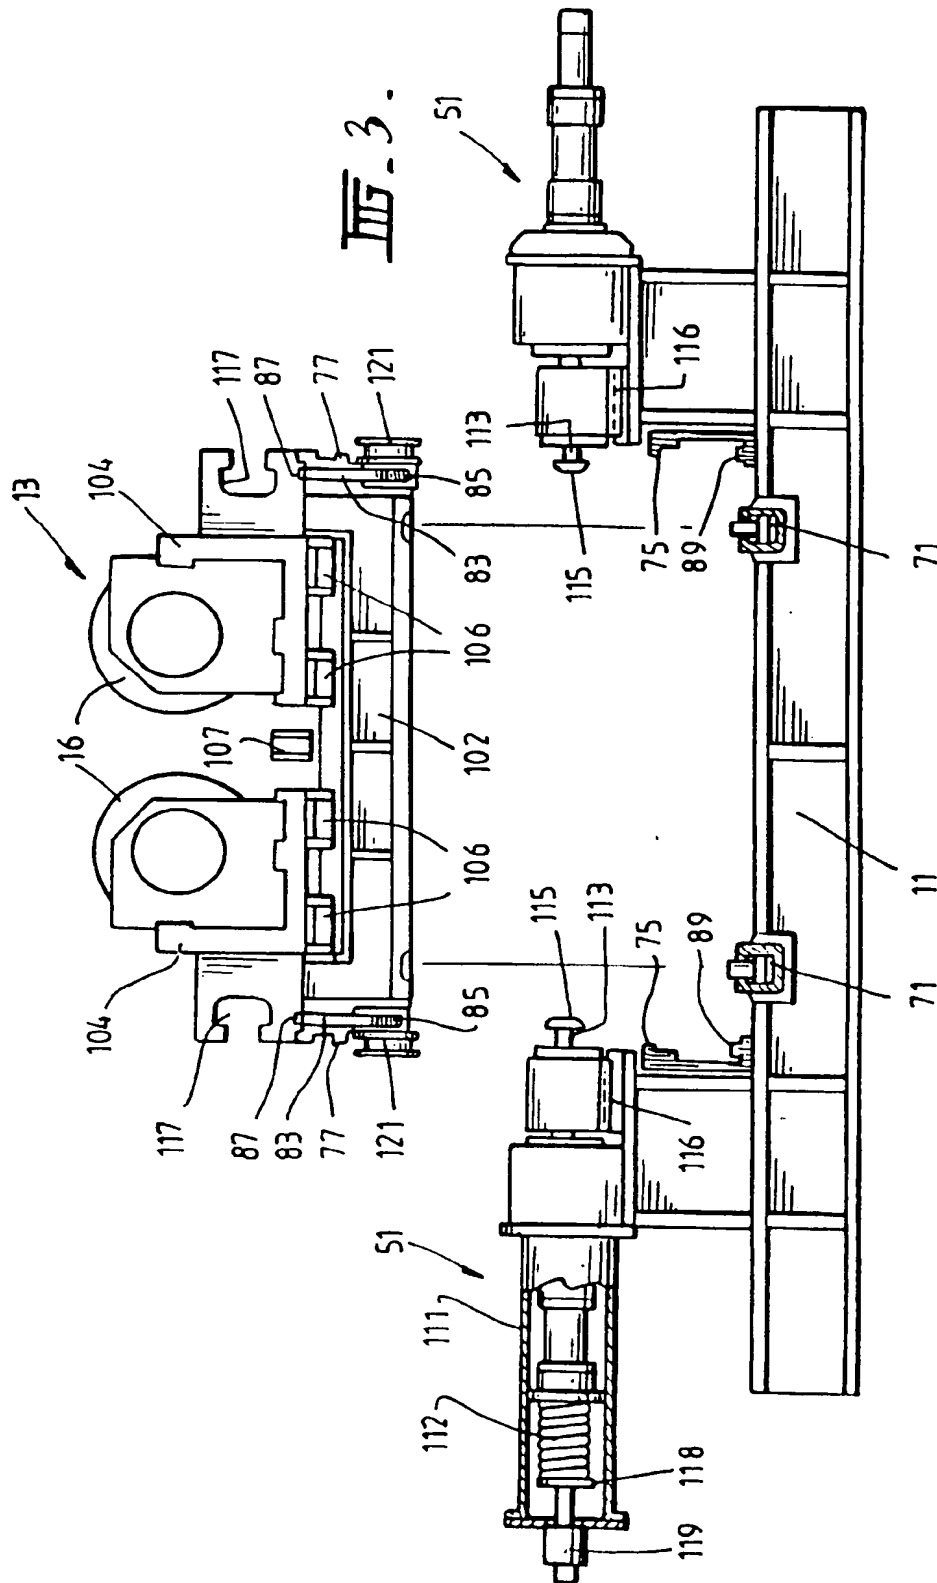


Fig. 2.



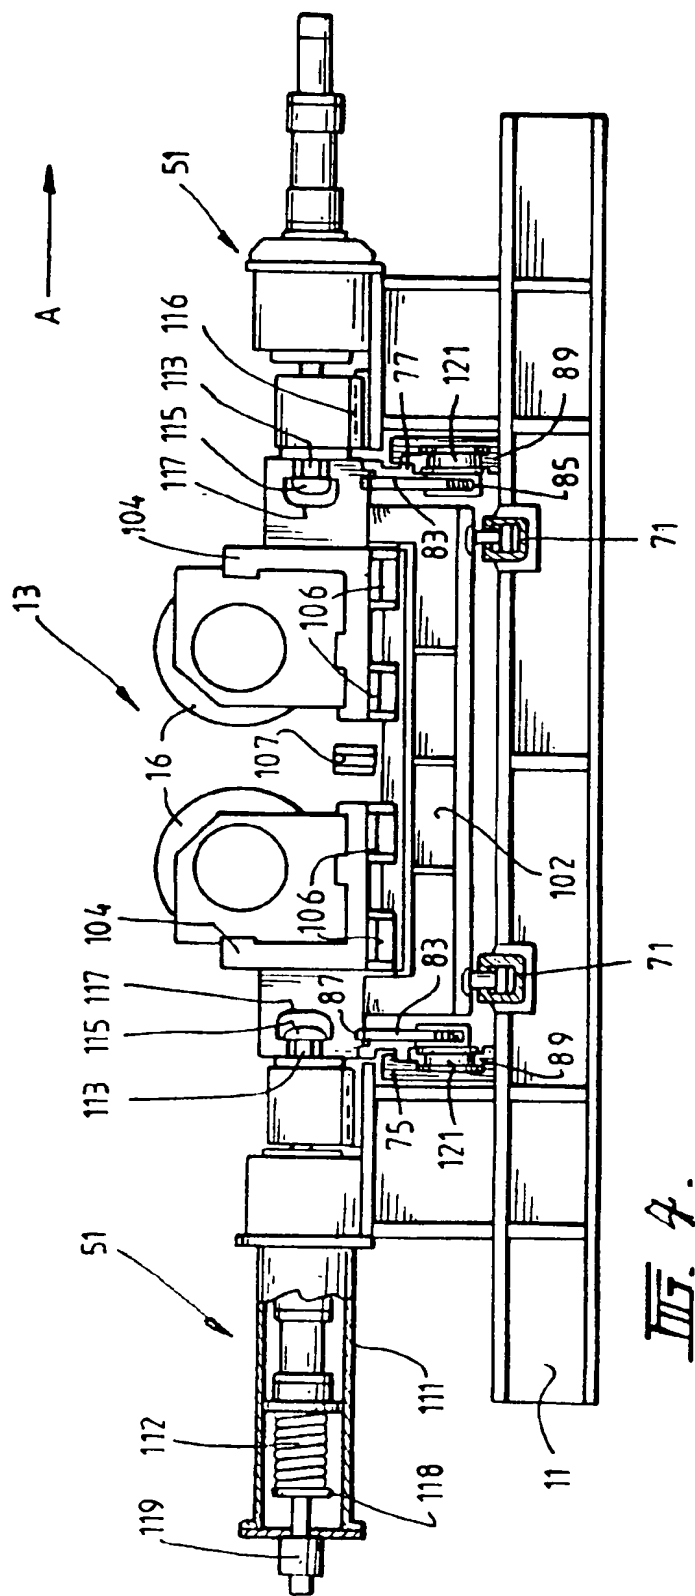


Fig. 4.




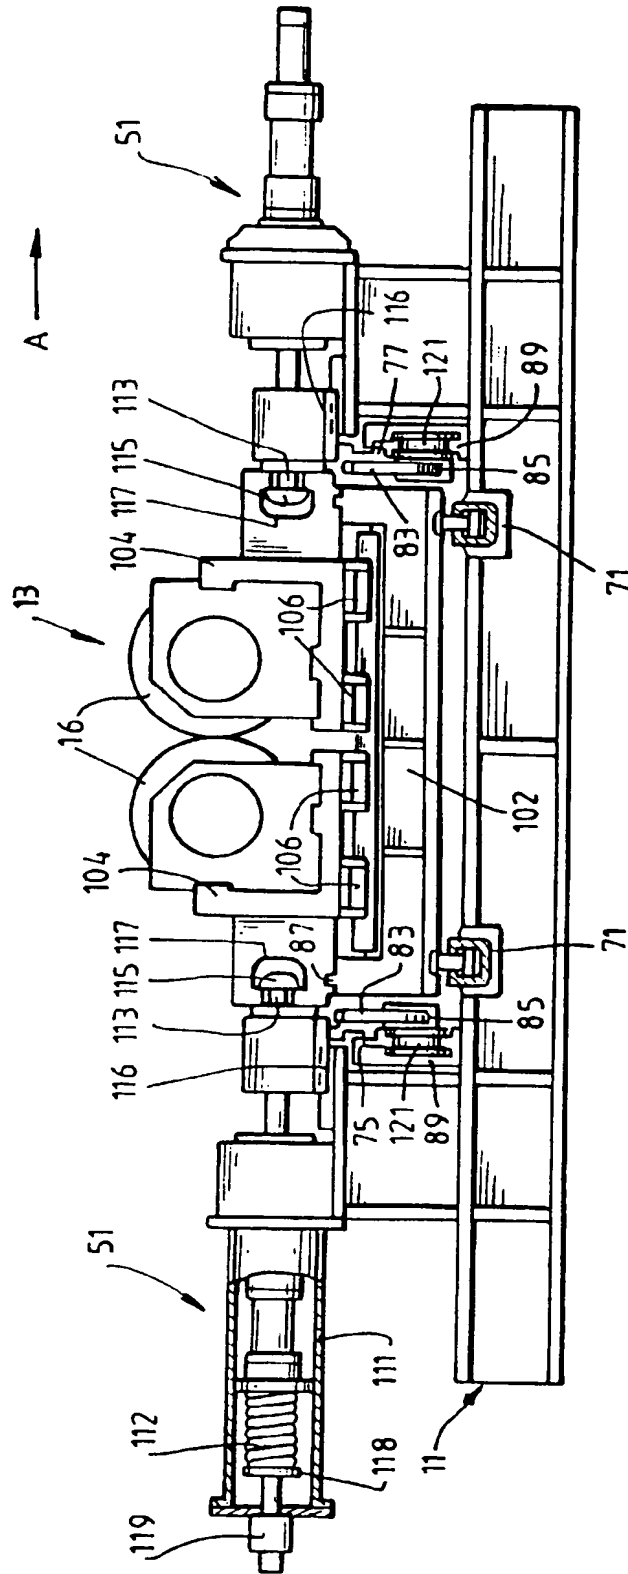


FIG. 5.



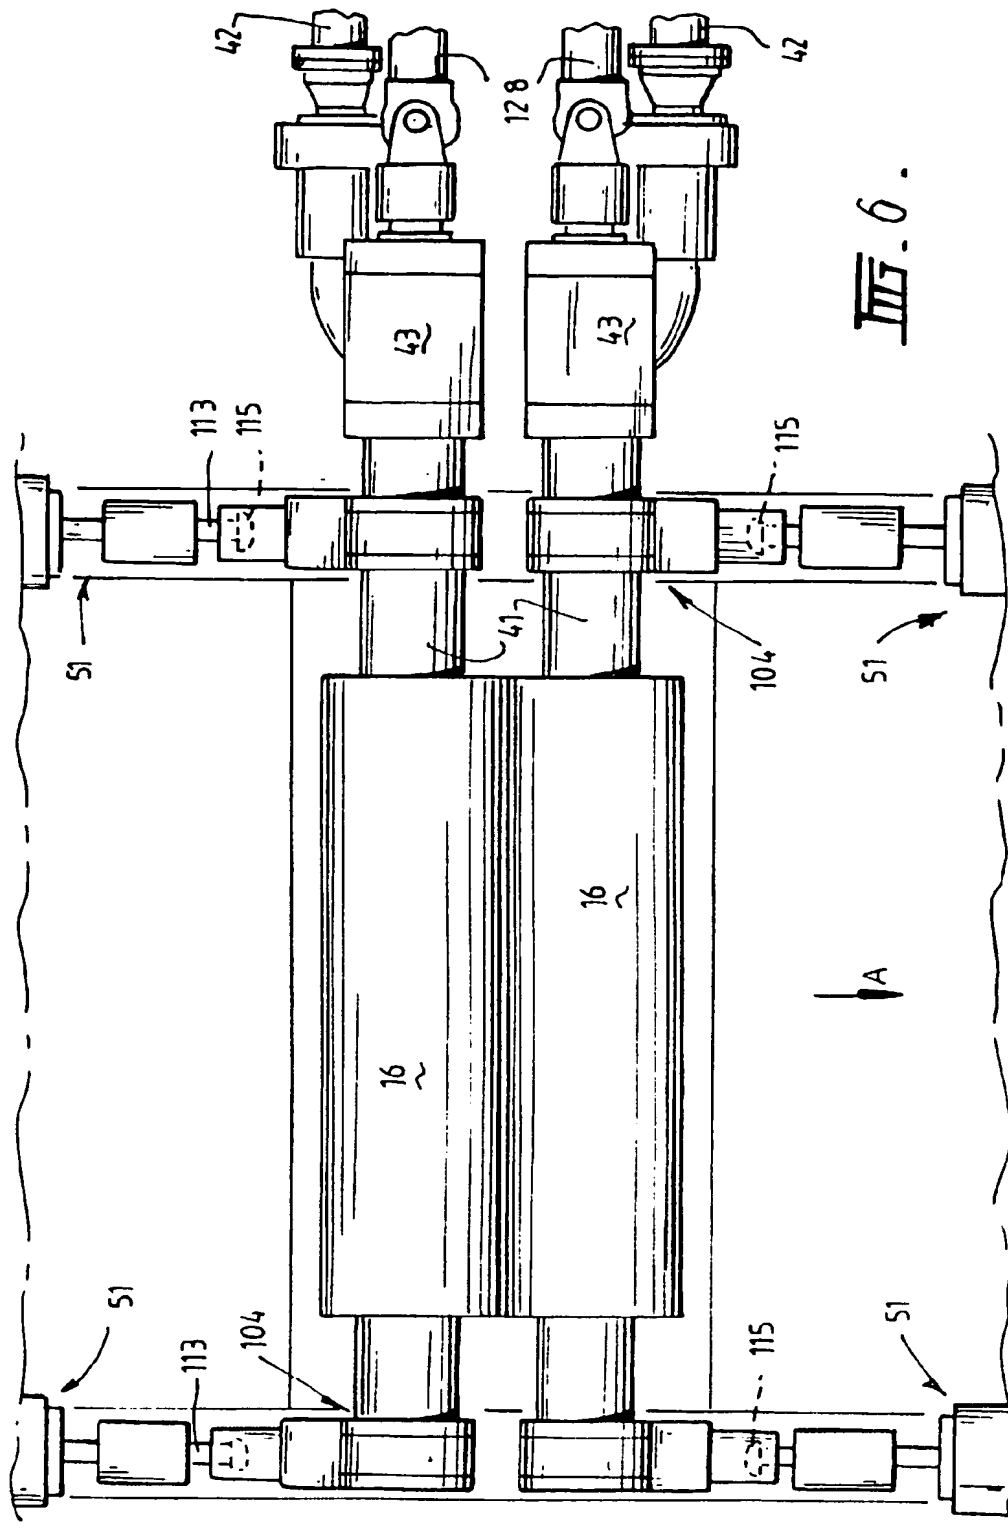

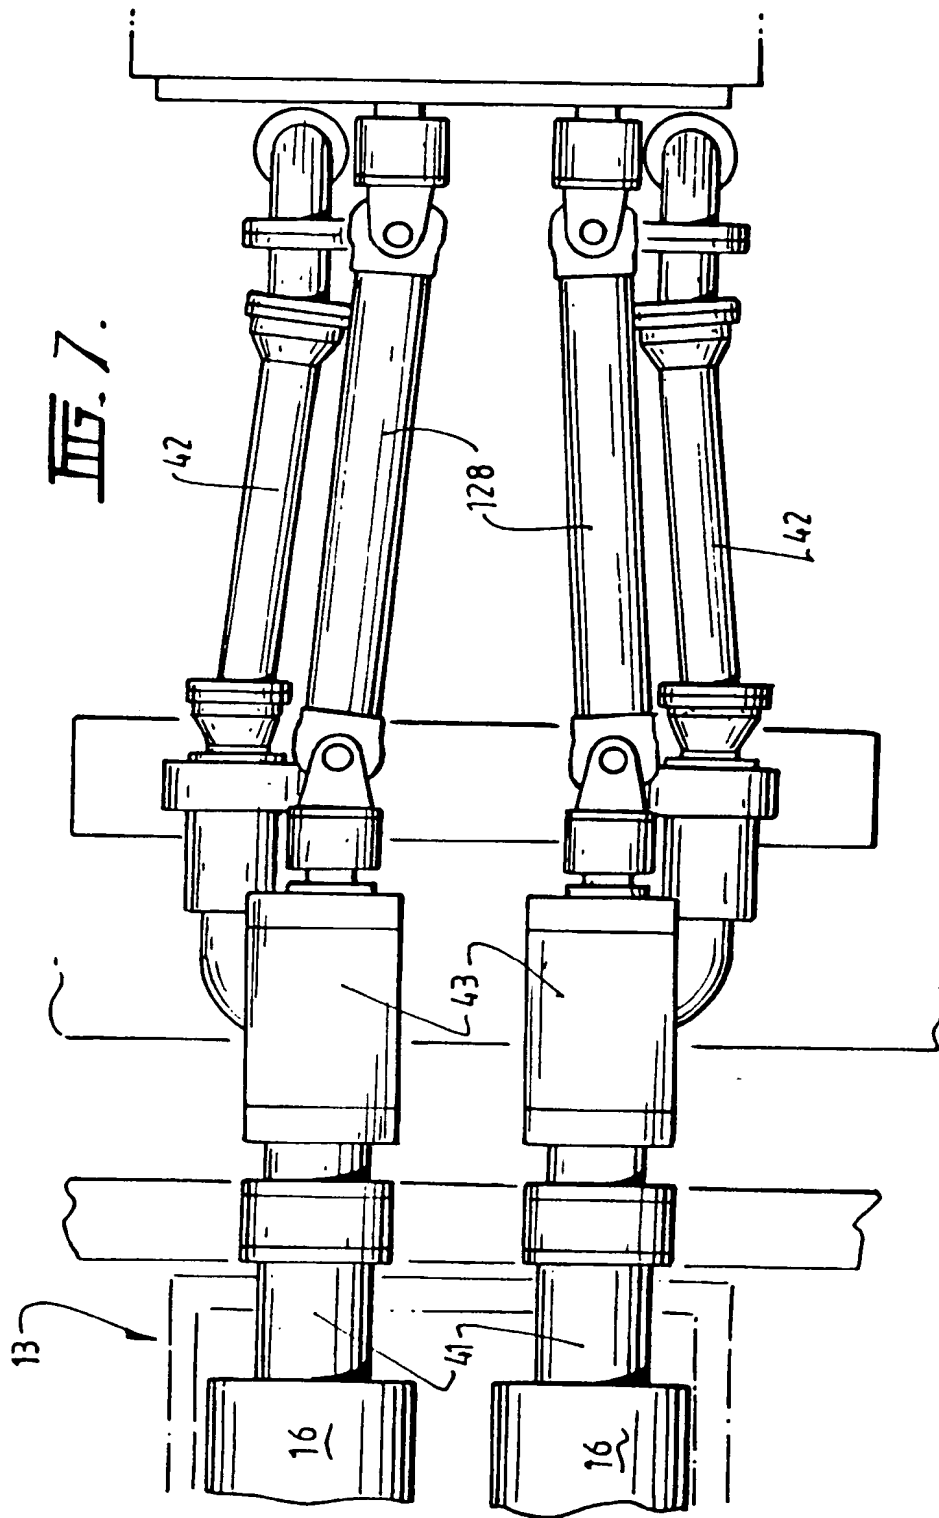

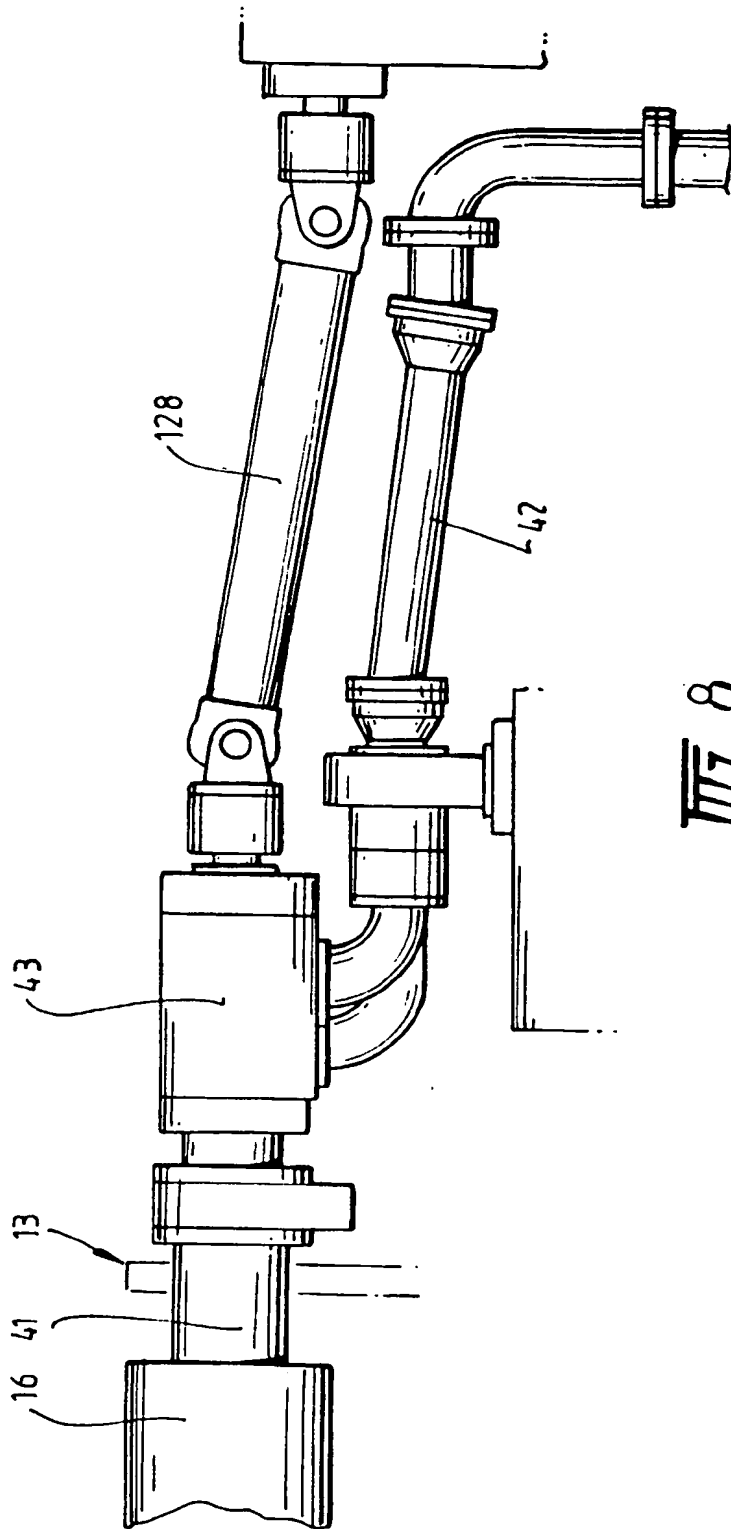

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

EP 0 947 261 A3

(12)

## EUROPEAN PATENT APPLICATION

(88) Date of publication A3:  
10.01.2001 Bulletin 2001/02

(51) Int Cl.7. B22D 11/06

(43) Date of publication A2:  
06.10.1999 Bulletin 1999/40

(21) Application number: 98307305.7

(22) Date of filing: 09.09.1998

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE  
Designated Extension States:  
AL LT LV MK RO SI

• BHP STEEL (JLA) PTY. Ltd.  
Melbourne, Victoria 3000 (AU)

(30) Priority: 18.09.1997 AU PO925397  
28.05.1998 AU PP375298

(72) Inventors:  
• Fish, John Andrew  
Woonona 2517 NSW (AU)  
• Kato, Heiji  
Yokosuka-shi, Kanagawa-ken (JP)


(71) Applicants:  
• Ishikawajima-Harima Heavy Industries Co., Ltd.  
Chiyoda-ku, Tokyo 100 (JP)

(74) Representative: Lerwill, John et al  
A.A. Thornton & Co.  
235 High Holborn  
London, WC1V 7LE (GB)

### (54) Strip casting apparatus

(57) Apparatus for continuously casting metal strip comprises a pair of parallel casting rolls (16). In use of the apparatus molten metal is delivered between the casting rolls which are rotated to deliver cast strip product downwardly from the rolls. casting rolls (16) are mounted on a roll module (13) installed in and remova-

ble from the caster as a unit. Module (13) is movable horizontally from a stand-by position to an intermediate position beneath a casting position of the rolls and can be hoisted from the intermediate position by operation of hoists (71) to lift the rolls (16) into their casting position.

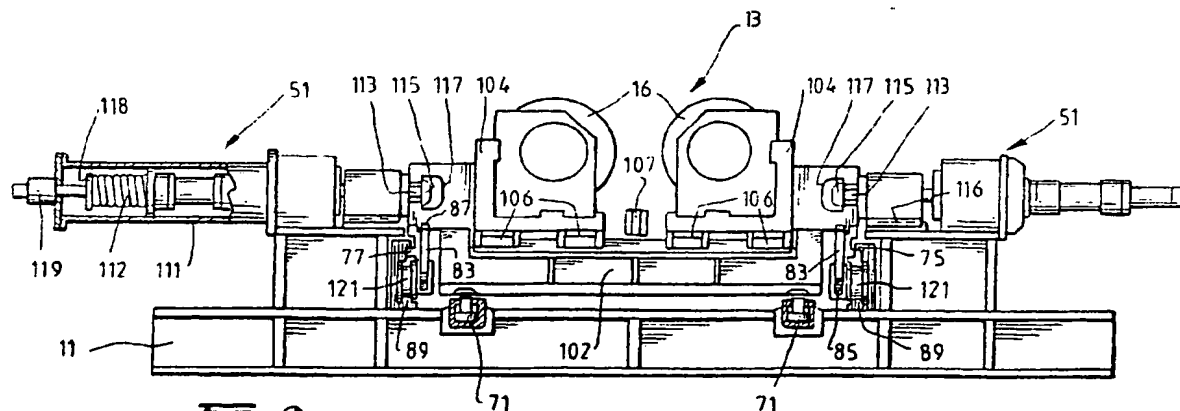

EP 0 947 261 A3



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 98 30 7305

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
D,A	US 5 184 668 A (FUKASE HISAHIKO ET AL) 9 February 1993 (1993-02-09) * the whole document *	1-24	B22D11/06
D,A	US 5 277 243 A (FUKASE HISAHIKO ET AL) 11 January 1994 (1994-01-11) * the whole document *	1-24	
D,A	US 5 488 988 A (FUKASE HISAHIKO ET AL) 6 February 1996 (1996-02-06) * the whole document *	1-24	
A	PATENT ABSTRACTS OF JAPAN vol. 009, no. 311 (M-436), 7 December 1985 (1985-12-07) & JP 60 145253 A (MITSUBISHI JUKOGYO KK), 31 July 1985 (1985-07-31) * abstract *	1-28	
A	US 4 308 741 A (ISHII HIKONORI ET AL) 5 January 1982 (1982-01-05) * column 1, line 33 - line 53; claim 1 *	1, 24	TECHNICAL FIELDS SEARCHED (Int.Cl.6) B22D B21D
The present search report has been drawn up for all claims			
Place of search BERLIN		Date of completion of the search 20 November 2000	Examiner Kesten, W
CATEGORY OF CITED DOCUMENTS X particularly relevant if taken alone Y particularly relevant if combined with another document of the same category A technical background O non-written disclosure P immediate document T theory or principle underlying the invention E earlier patent document, but published on or after the filing date D document cited in the application L document cited for other reasons & member of the same patent family, corresponding document			

EP 0 947 261 A3 (1998-01-01)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 98 30 7305

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

20-11-2000

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5184668 A	09-02-1993	AT 153573 T	15-06-1997
		AU 631728 B	03-12-1992
		AU 7289791 A	10-10-1991
		BR 9101329 A	26-11-1991
		CA 2039662 A	05-10-1991
		CN 1055311 A, B	16-10-1991
		DE 69126229 D	03-07-1997
		DK 450775 T	30-06-1997
		EP 0450775 A	09-10-1991
		ES 2103775 T	01-10-1997
		GR 3024486 T	28-11-1997
		JP 6339753 A	13-12-1994
		KR 210519 B	15-07-1999
		NZ 237557 A	23-12-1992
		US 5277243 A	11-01-1994
US 5277243 A	11-01-1994	AT 153573 T	15-06-1997
		AU 631728 B	03-12-1992
		AU 7289791 A	10-10-1991
		BR 9101329 A	26-11-1991
		CA 2039662 A	05-10-1991
		CN 1055311 A, B	16-10-1991
		DE 69126229 D	03-07-1997
		DK 450775 T	30-06-1997
		EP 0450775 A	09-10-1991
		ES 2103775 T	01-10-1997
		GR 3024486 T	28-11-1997
		JP 6339753 A	13-12-1994
		KR 210519 B	15-07-1999
		NZ 237557 A	23-12-1992
		US 5184668 A	09-02-1993
US 5488988 A	06-02-1996	AT 194525 T	15-07-2000
		AU 664670 B	23-11-1995
		AU 5935294 A	01-12-1994
		BR 9402099 A	13-12-1994
		CA 2124399 A	28-11-1994
		CN 1100978 A	05-04-1995
		DE 69425191 D	17-08-2000
		EP 0627275 A	07-12-1994
		JP 7132350 A	23-05-1995
		NZ 260389 A	27-06-1995
		ZA 9402888 A	01-02-1996
JP 60145253 A	31-07-1985	JP 1803466 C	26-11-1993
		JP 5009185 B	04-02-1993

EPO FORM P445

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 98 30 7305

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

20-11-2000

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4308741 A	05-01-1982	JP 1220859 C	26-07-1984
		JP 55114410 A	03-09-1980
		JP 58051764 B	18-11-1983
		BR 8000156 A	23-09-1980
		DE 3000448 A	28-08-1980
		FR 2450130 A	26-09-1980
<hr/>			

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No 12/82